



**103458**


**PERUN SLIM Ex 1.4ft 4400/840 3F**

**8596328034589**



- Degree of protection: IP65
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 133 lm/W
- Cable glands: PG 13.5 thread, brass with surface finish
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 30
- Max. number of luminaires per circuit breaker C16: 51
- Power factor: 0,95
- Energy efficiency class of the light source: C

- Body: steel sheet, impact resistant, chemically resistant
- Diffuser: satin, heat-strengthened safety glass
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel
- Sealing: silicone, on the base of the light
- Connection: Screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm<sup>2</sup> cross-section, 2.5 mm<sup>2</sup> available on demand)
- A highly resistant luminaire suitable for explosive atmospheres caused by flammable gases, mists and vapours (see user manual and certificate)
- The base is made of austenitic stainless steel 1.4301 / AISI 304 with high corrosion resistance.
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- ON/OFF electronic driver (AC, DC on demand)

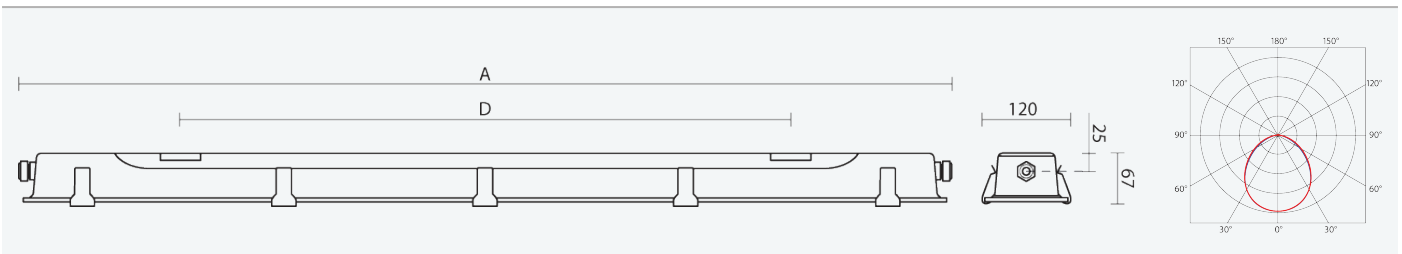

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
103458	PERUN SLIM Ex 1.4ft 4400/840 3F	45	5020	4020	30,3	133	4,5	1290	850

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %


FEATURES




CERTIFICATION



DOWNLOAD





**103458**

PERUN SLIM Ex 1.4ft 4400/840 3F

**8596328034589**

